




## Stairway landings, ramps, and walkways

Falls from elevation are one of the leading causes of injuries to construction workers in British Columbia.


- Stairways complete with handrails must be installed before beginning work on the next floor level.
- Stairs with more than four risers must have continuous handrails installed.
- Stairway landings, ramps, and walkways that are 1.2 m (4 ft.) or more above grade must have guardrails.



*The slope of work platforms must not exceed one vertical to five horizontal. Slope work platforms must have cleats spaced no more than 400 mm (16 in.) apart or a non-skid surface.*

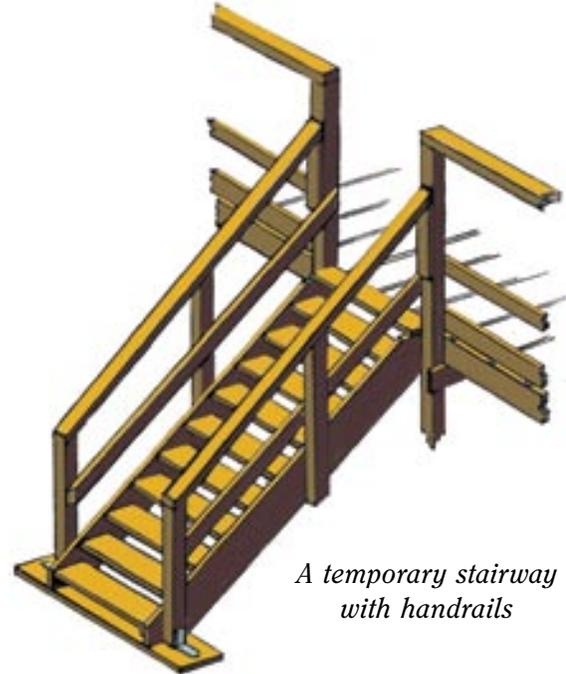


*A temporary stairway with handrails*

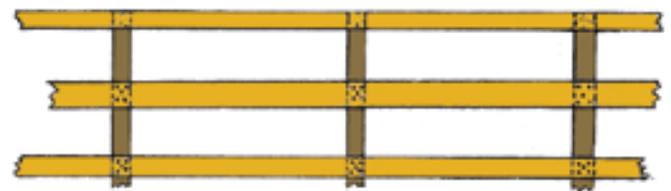

*This image shows a detail of a standard guardrail.*

- Workers must be prevented from falling when working 3 m (10 ft.) or more above grade. Standard guardrails or fall protection equipment must be used for this purpose.

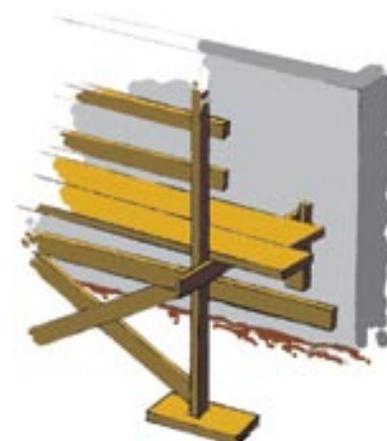

*Guardrails are required when the work platform is 3 m (10 ft.) or more above grade.*

Project: \_\_\_\_\_ Address: \_\_\_\_\_

Employer: \_\_\_\_\_ Supervisor: \_\_\_\_\_

Date: \_\_\_\_\_ Time: \_\_\_\_\_ Shift: \_\_\_\_\_

Number in crew: \_\_\_\_\_ Number attending: \_\_\_\_\_

Other safety issues or suggestions made by crew members:

---

---

---

---

---

Record of those attending:

Name: (please print)	Signature:	Company:
1.		
2.		
3.		
4.		
5.		
6.		
7.		
8.		
9.		
10.		
11.		
12.		
13.		
14.		
15.		

Manager's remarks: \_\_\_\_\_

---

Manager: \_\_\_\_\_ Supervisor: \_\_\_\_\_

*(signature)*

*(signature)*



WORKING TO MAKE A DIFFERENCE  
worksafebc.com